


IGBT Discrete

V_{CE}	1200	V
I_C	15	A
$V_{CE(SAT)} I_C=15A$	1.55	V

Circuit



Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

Features

- Low $V_{CE(sat)}$ Trench-FS IGBT technology
- Maximum junction temperature 175°C
- Positive temperature coefficient
- Including fast & soft recovery anti-parallel FWD
- High short circuit capability(10us)

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-Emitter Breakdown Voltage	V_{CE}	1200	V
DC Collector Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_C	30 15	A
Diode Forward Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_F	30 15	A
Continuous Gate-Emitter Voltage	V_{GE}	± 20	V
Transient Gate-Emitter Voltage ($t_p \leq 10\mu s, D < 0.010$)	V_{GE}	± 30	V
Turn off Safe Operating Area $V_{CE} \leq 1200V$, $T_j \leq 150^{\circ}C$		60	A
Pulsed Collector Current, $V_{GE}=15V$, t_p limited by T_{jmax}	I_{CM}	60	A
Diode Pulsed Current, t_p limited by T_{jmax}	I_{Fpuls}	60	A
Short Circuit Withstand Time, $V_{GE}=15V, V_{CC}=600V, V_{CEM} \leq 1200V$	T_{sc}	10	μs
Power Dissipation, $T_j=175^{\circ}C, T_C=25^{\circ}C$	P_{tot}	150	W



Operating Junction Temperature	T_j	-40...+175	°C
Storage Temperature	T_s	-55...+150	°C
Soldering Temperature, wave soldering 1.6mm (0.063in.) from case for 10s		260	°C

Electrical Characteristics of the IGBT ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	1200		-	V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=0.5mA$	5.2	5.8	6.4	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=15A$ $T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$ $T_j=150^\circ\text{C}$		1.55 1.80 1.90	2.05	V
Zero Gate Voltage Collector Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V$ $T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$			0.25 5.00	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V, V_{GE}= \pm 20V$			100	nA

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz$	-	1.72	-	nF
Reverse Transfer Capacitance	C_{res}		-	0.02	-	
Gate Charge	Q_G	$V_{CC}=600V, I_C=15A,$ $V_{GE}=15V$	-	0.14	-	uC
Short Circuit Collector Current	I_{SC}	$V_{GE}=15V, t_{sc} \leq 10\mu s,$ $V_{CC}=600V, T_j \leq 150^\circ\text{C}$	-	75	-	A


Electrical Characteristics of the Diode ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Diode Forward Voltage	V_F	$I_F = 15\text{A}$ $T_j = 25^\circ\text{C}$, $T_j = 125^\circ\text{C}$ $T_j = 150^\circ\text{C}$		2.20 2.05 2.00	2.60	V

Switching Characteristic, Inductive Load

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T _j = 25℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} = 600V, I _C =15A, V _{GE} = -5v~15V, R _g =20 Ω	-	54	-	ns
Rise Time	t _r		-	47	-	ns
Turn-on Energy	E _{on}		-	0.8	-	mJ
Turn-off Delay Time	t _{d(off)}		-	184	-	ns
Fall Time	t _f		-	230	-	ns
Turn-off Energy	E _{off}		-	1.1	-	mJ
Dynamic , at T _j = 125℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} = 600V, I _C =15A, V _{GE} = -5v~15V, R _g =20 Ω	-	51	-	ns
Rise Time	t _r		-	47	-	ns
Turn-on Energy	E _{on}		-	0.9	-	mJ
Turn-off Delay Time	t _{d(off)}		-	204	-	ns
Fall Time	t _f		-	331	-	ns
Turn-off Energy	E _{off}		-	1.5	-	mJ
Dynamic , at T _j = 150℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} = 600V, I _C =15A, V _{GE} = -5v~15V, R _g =20 Ω	-	50	-	ns
Rise Time	t _r		-	48	-	ns
Turn-on Energy	E _{on}		-	0.9	-	mJ
Turn-off Delay Time	t _{d(off)}		-	219	-	ns
Fall Time	t _f		-	403	-	ns
Turn-off Energy	E _{off}		-	1.6	-	mJ











Electrical Characteristics of the DIODE





Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T _j = 25°C						
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=270A/μs,	-	7.6	-	A
Reverse Recovery Time	T _{rr}		-	190	-	ns
Reverse Recovery Charge	Q _{rr}		-	0.7	-	uC
Reverse Recovery Energy	E _{rec}		-	0.24	-	mJ
Dynamic , at T _j = 125°C						
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=270A/μs,	-	10.4	-	A
Reverse Recovery Time	T _{rr}		-	270	-	ns
Reverse Recovery Charge	Q _{rr}		-	1.3	-	uC
Reverse Recovery Energy	E _{rec}		-	0.50	-	mJ
Dynamic , at T _j = 150°C						
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=270A/μs,	-	11.6	-	A
Reverse Recovery Time	T _{rr}		-	300	-	ns
Reverse Recovery Charge	Q _{rr}		-	1.6	-	uC
Reverse Recovery Energy	E _{rec}		-	0.60	-	mJ





Thermal Resistance




Parameter	Symbol	Max. Value	Unit
IGBT Thermal Resistance, Junction - Case	R _{th(j-c)}	1.00	K/W
Diode Thermal Resistance, Junction - Case	R _{th(j-c)}	2.00	K/W
Thermal Resistance, Junction - Ambient	R _{th(j-a)}	40	K/W

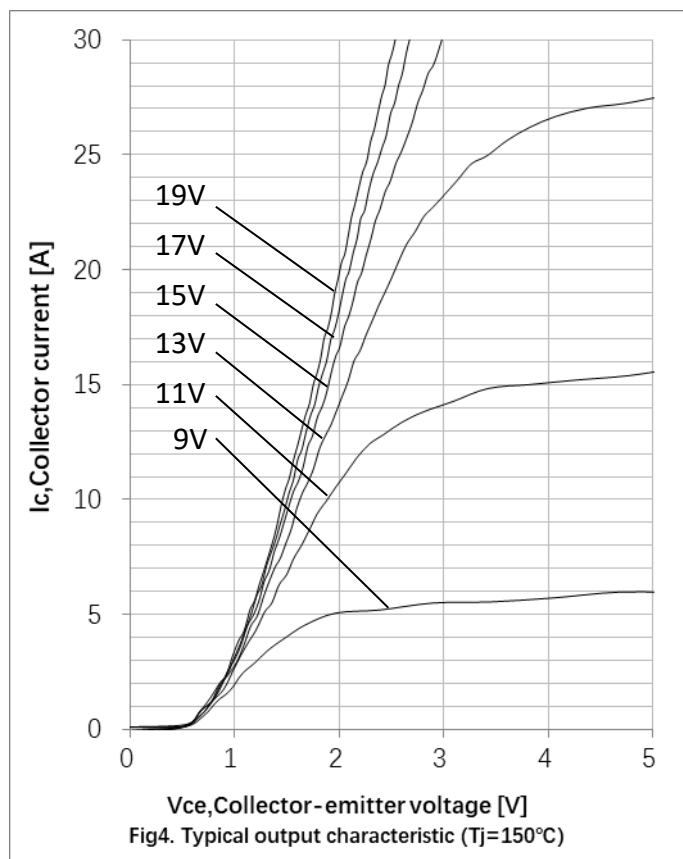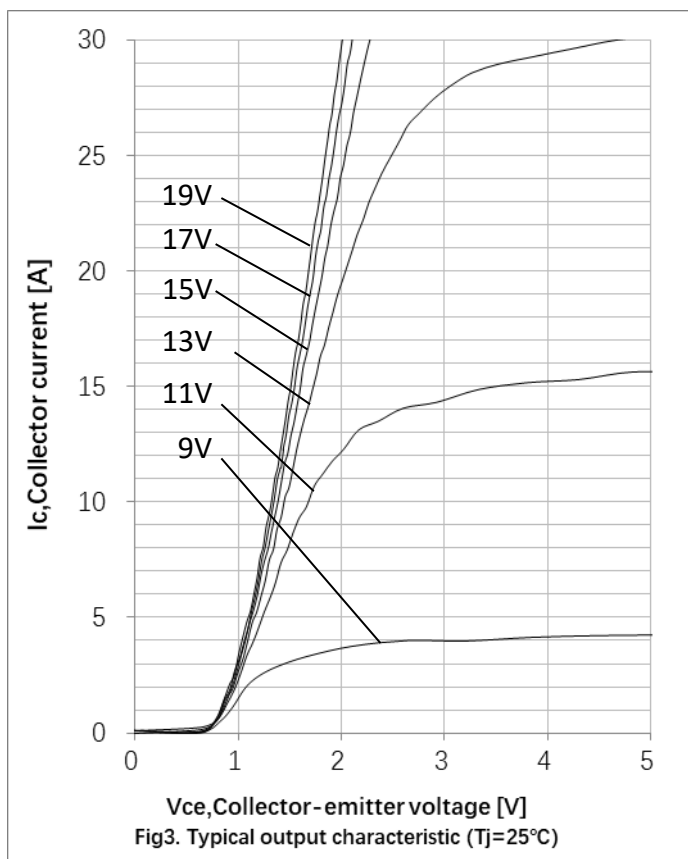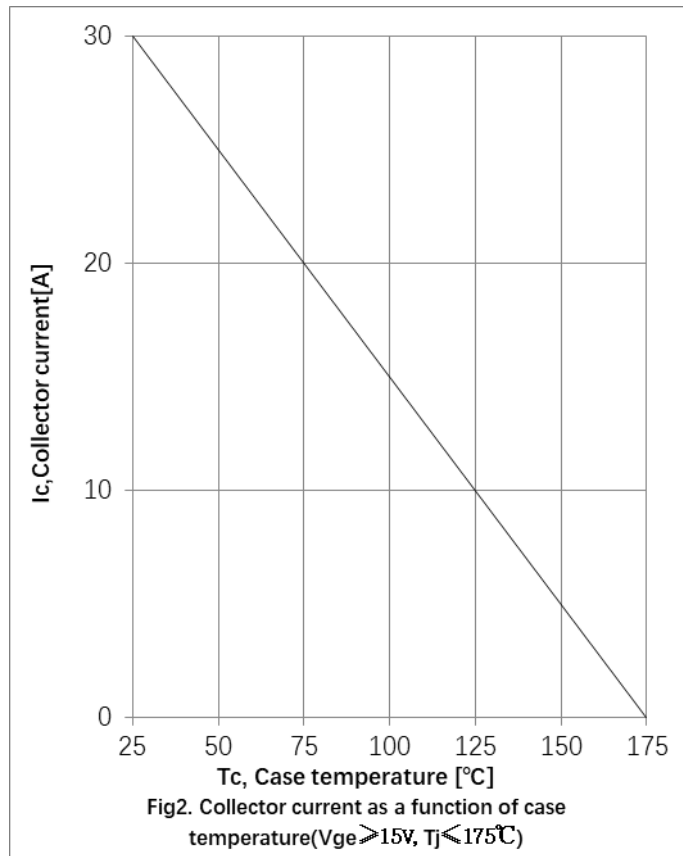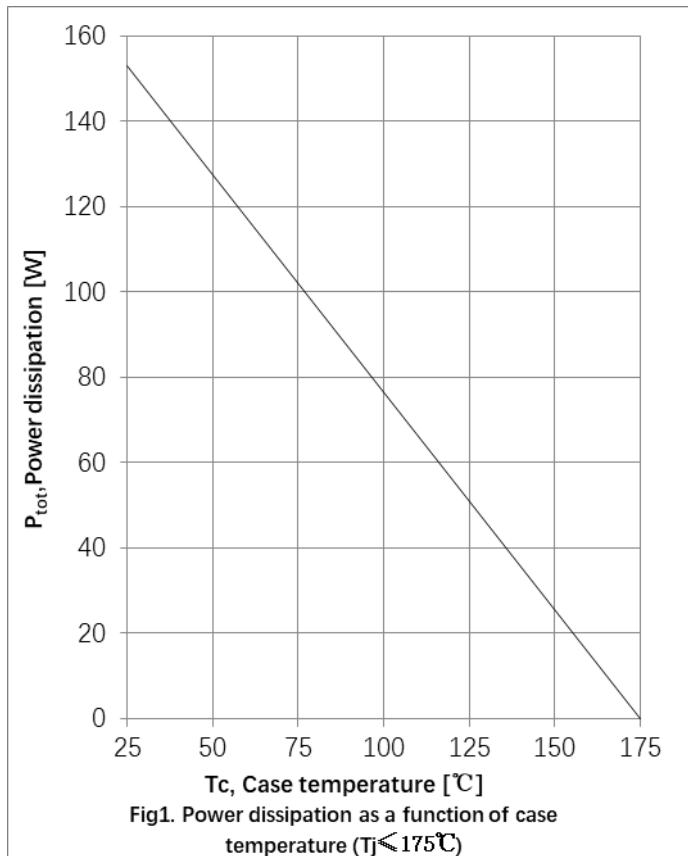

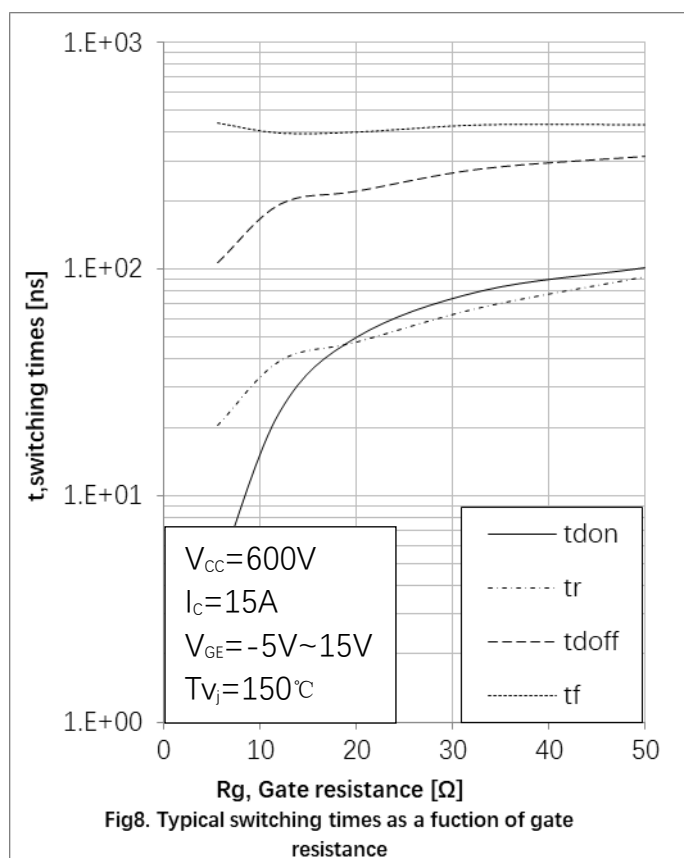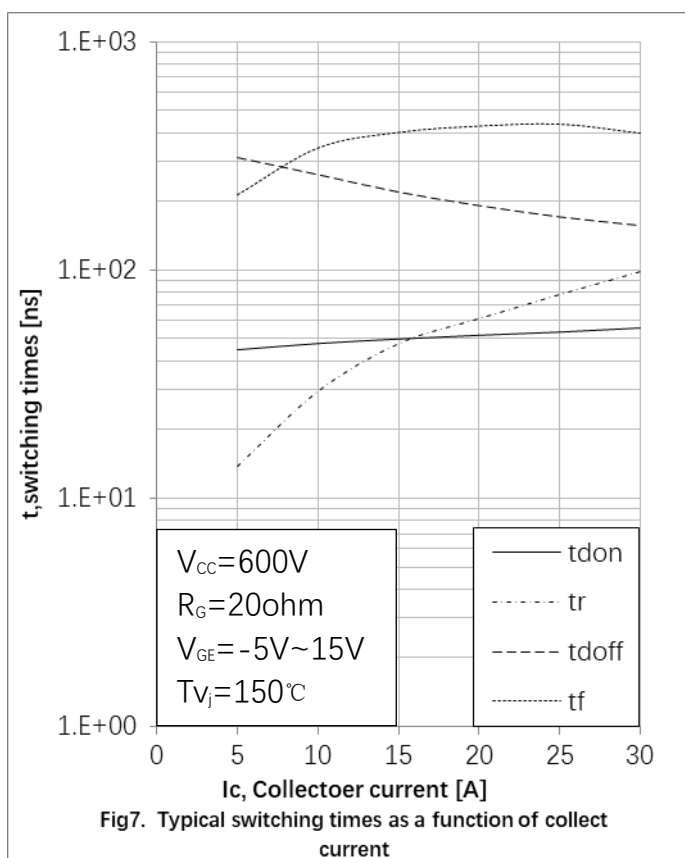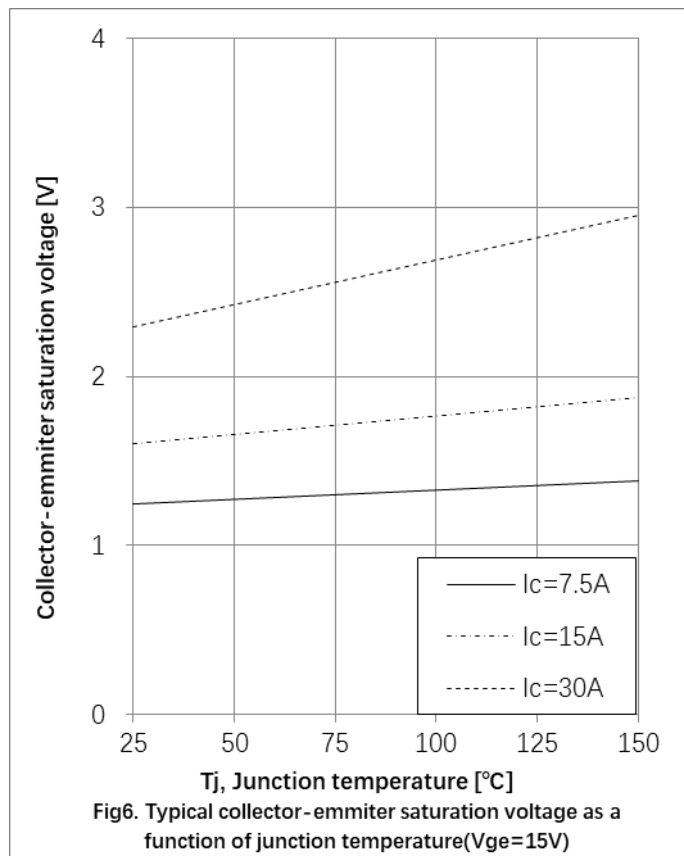
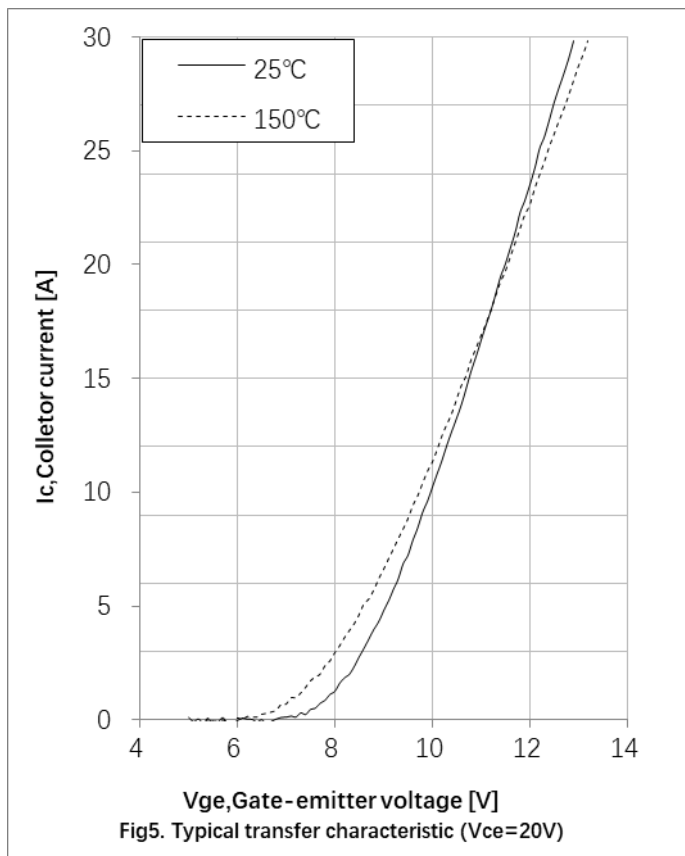


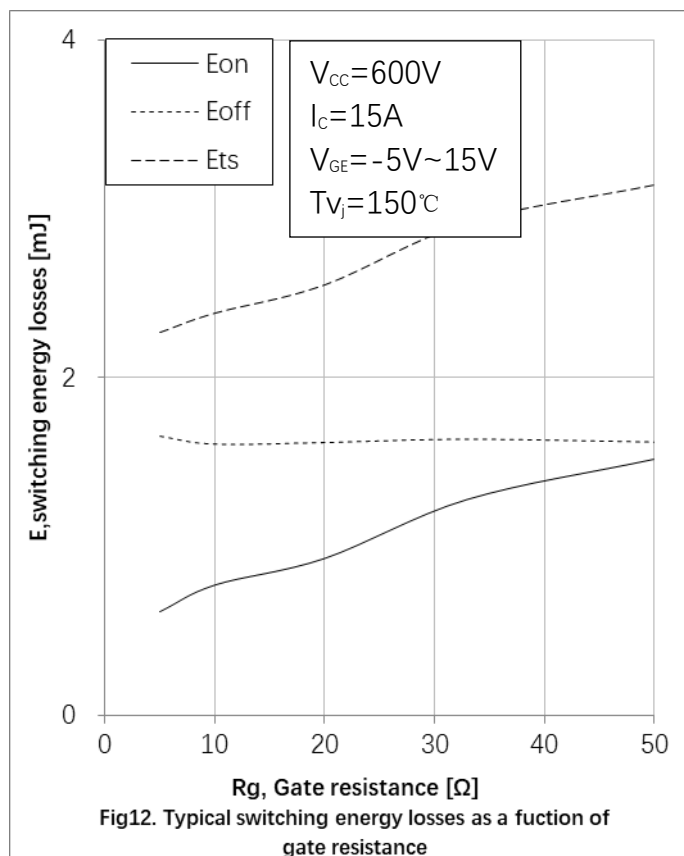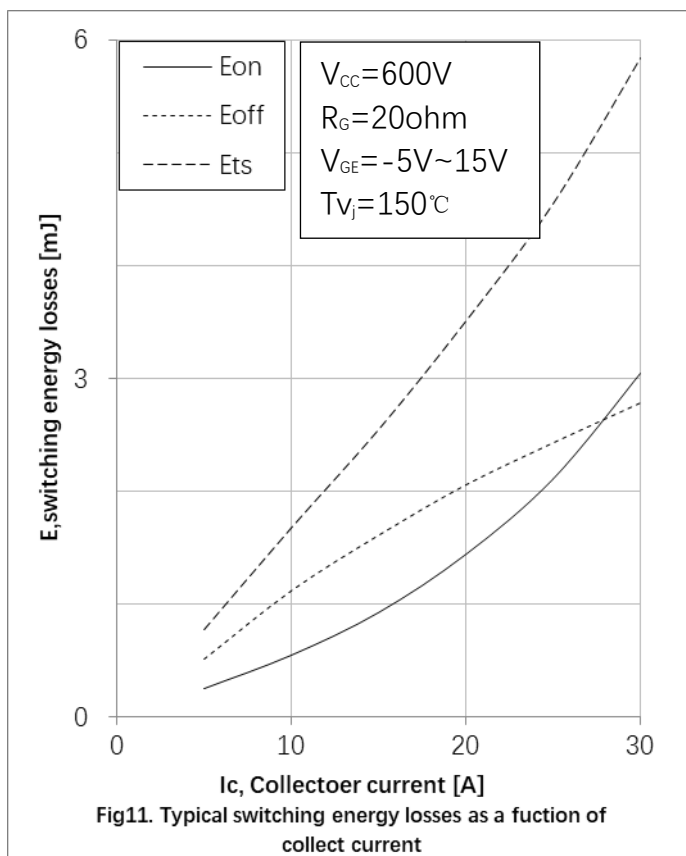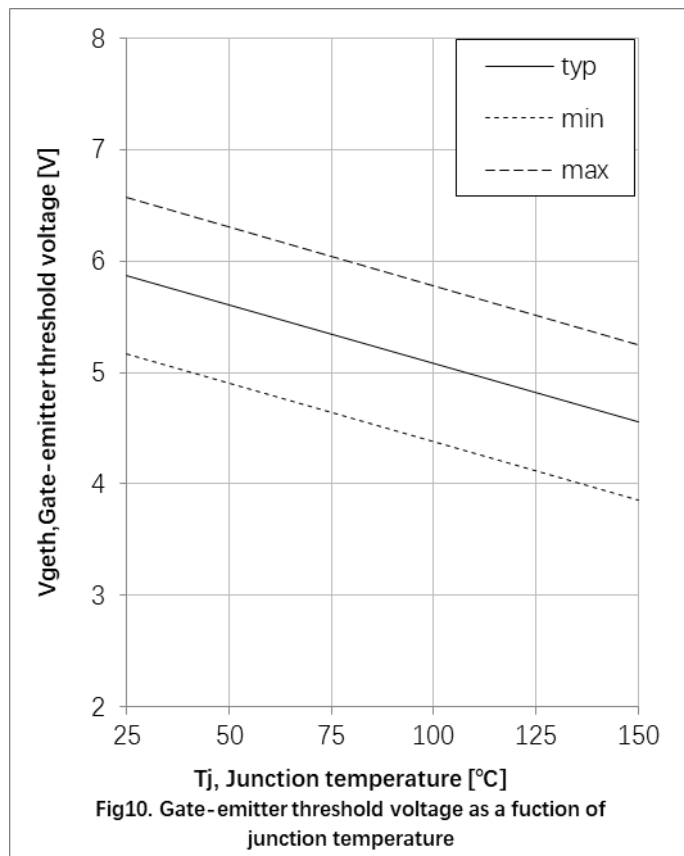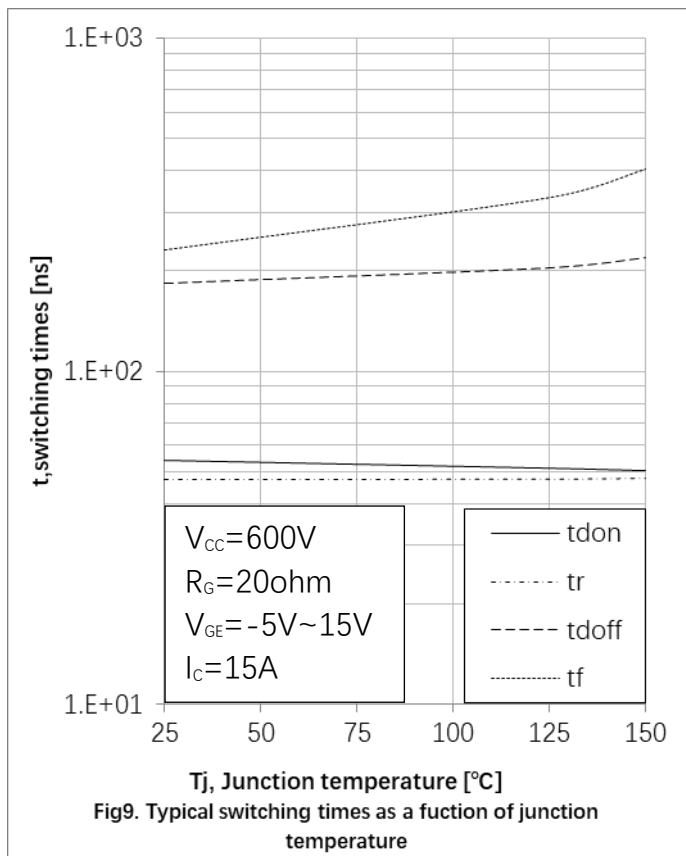

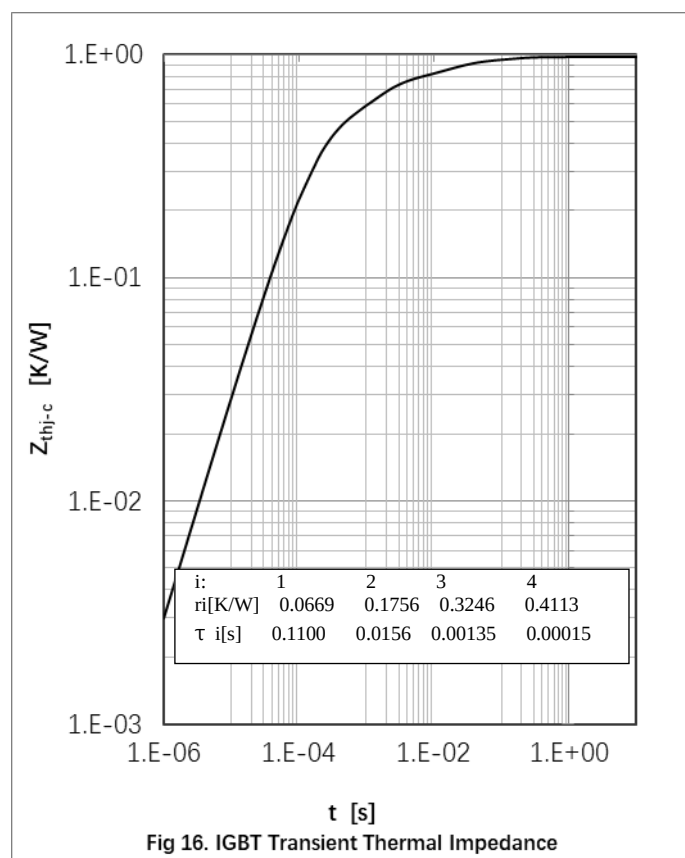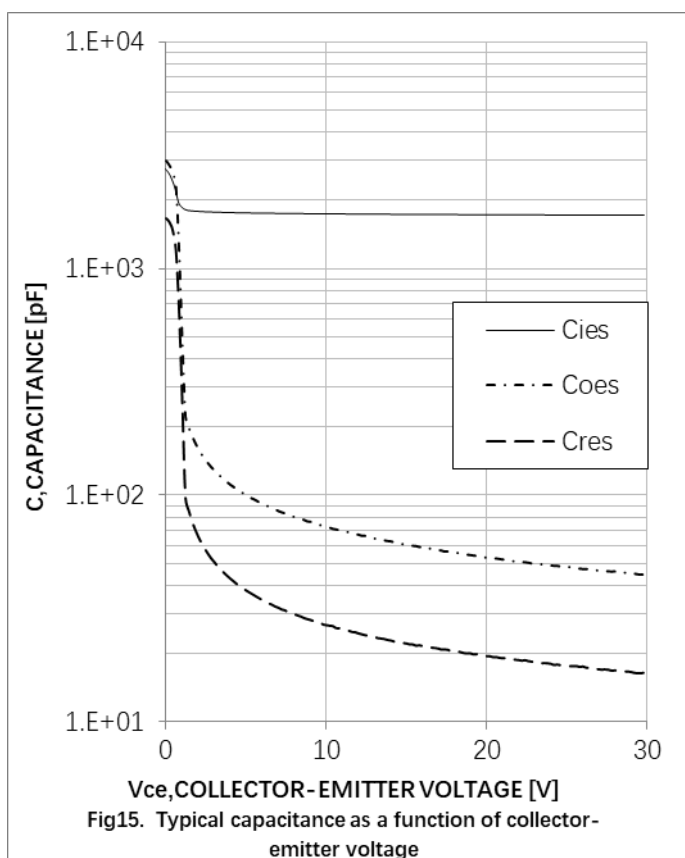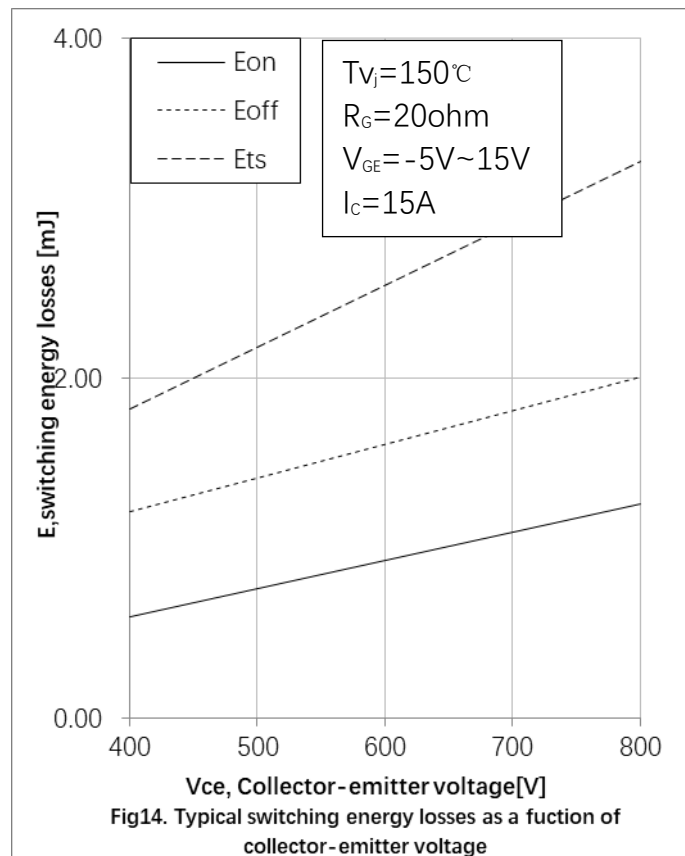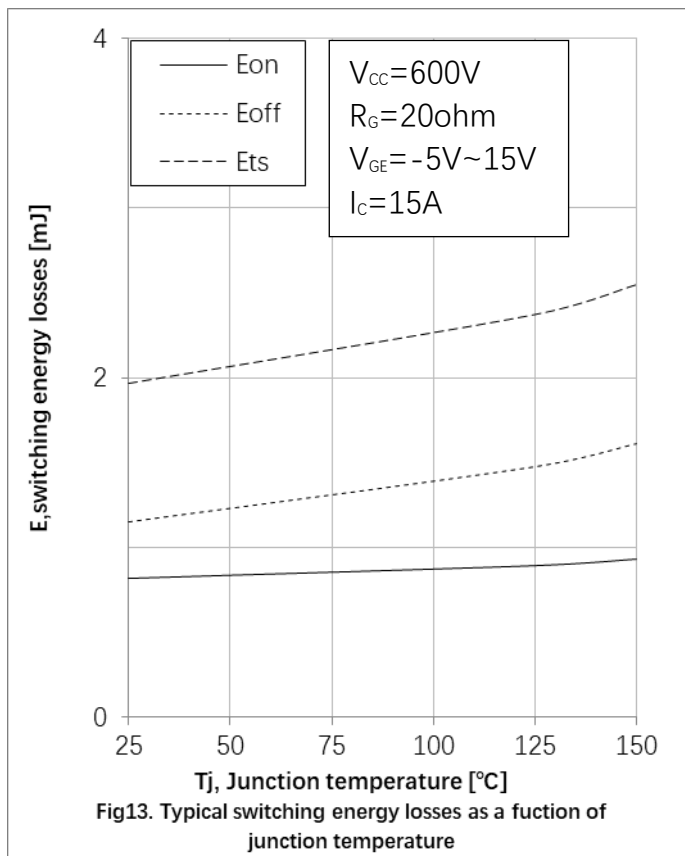

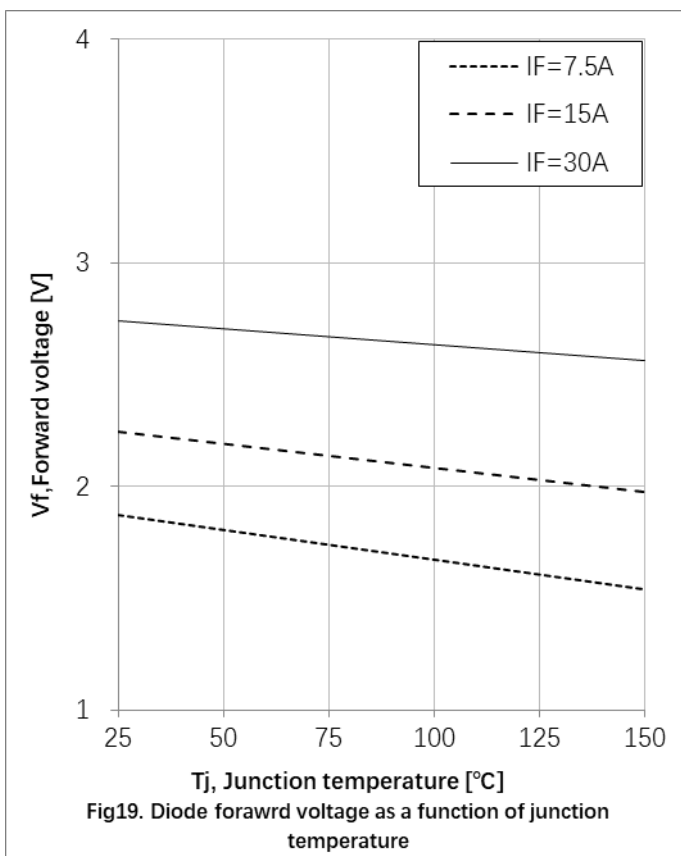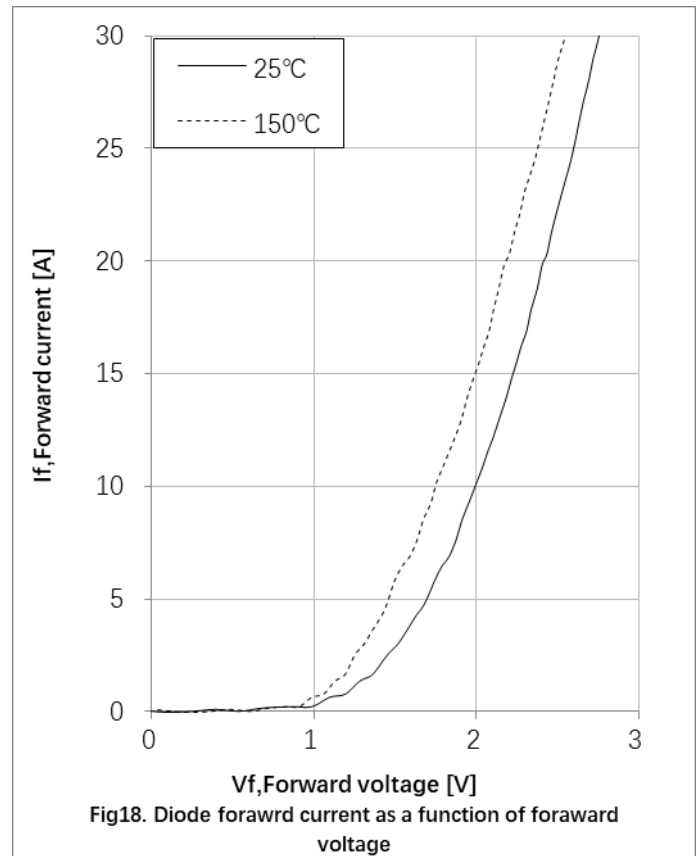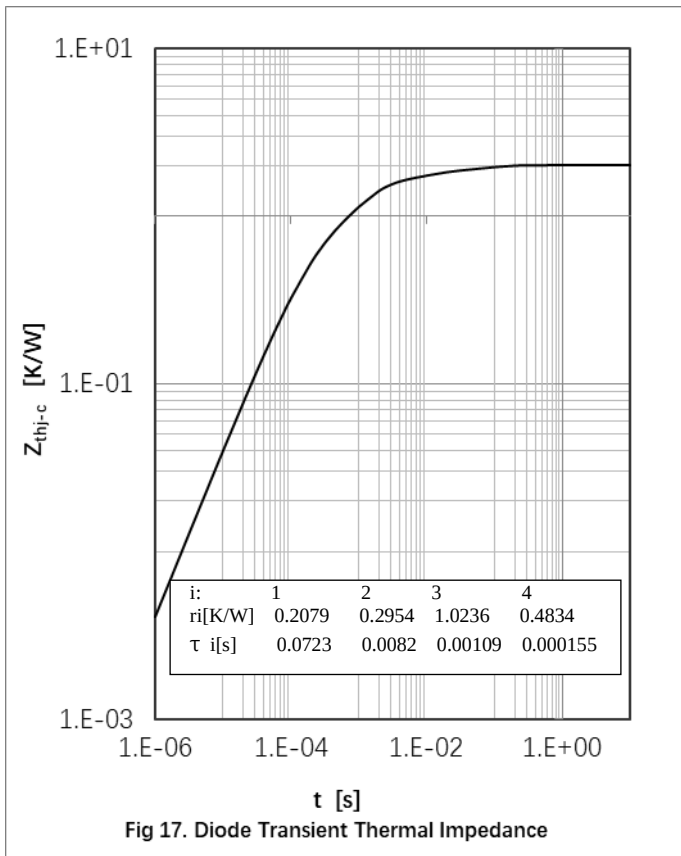


● Circuit Diagram



● Package Outline Information


CASE: TO 247

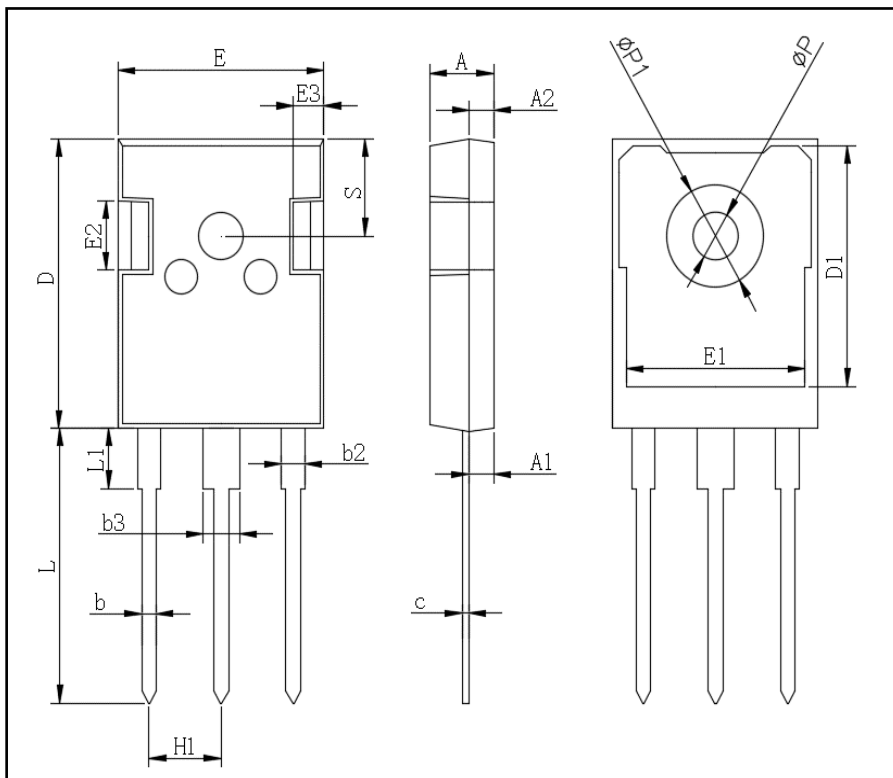

TO-247AB		
Dim	Min	Max
A	4.80	5.20
A1	2.21	2.61
A2	1.85	2.15
b	1.0	1.4
b2	1.91	2.21
C	0.5	0.7
D	20.70	21.30
D1	16.25	16.85
E	15.50	16.10
E1	13.0	13.6
E2	4.80	5.20
E3	2.30	2.70
L	19.62	20.22
L1	-	4.30
Φ P	3.40	3.80
Φ P1	-	7.30
S	6.15TYP	
H1	5.44TYP	
b3	2.80	3.20




Marking Information

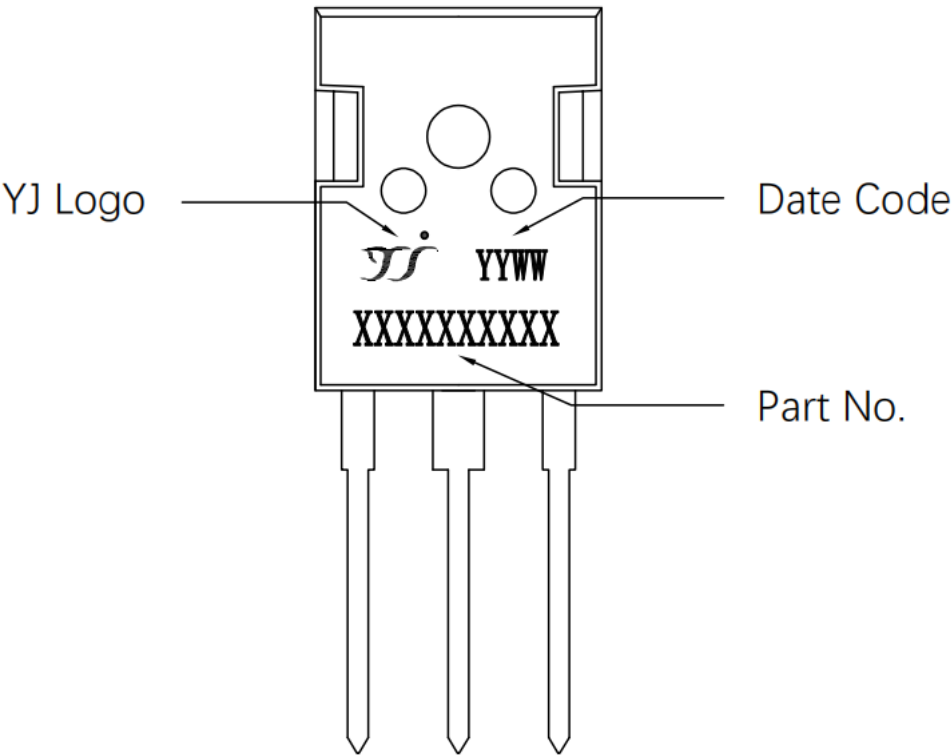

Package Parameters

Base Part Number	Package Type	Standard Pack		Orderable Part Number
		Form	Quantity	
DGW15N120CTL1A	TO-247	Tube	30	DGW15N120CTL1A

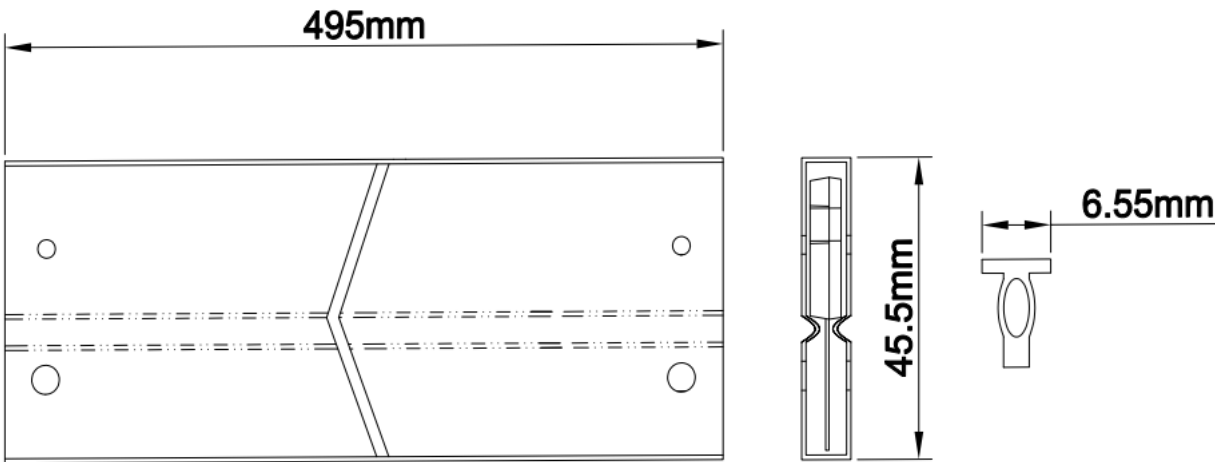



Disclaimer

The information presented in this document is for reference only. This publication is made by Yangzhou Yangjie Electronic Technology Co., Ltd. , our company reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The data provided in this specification comes from professional testing equipment of Yangjie Electronic Laboratory, not general testing equipment. All the data is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

IGBTs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.