



Rectifier Diode Module

VRRM 1200 to 2000V

IFAV 350A


Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Features

- International standard package
- High Surge Capability
- Simple Mounting

Circuit



Blocking Characteristics

TYPE			VRRM	VRSM	Units
MD350C12D3	MD350A12D3	MD350K12D3	1200V	1300V	V
MD350C14D3	MD350A14D3	MD350K14D3	1400V	1500V	V
MD350C16D3	MD350A16D3	MD350K16D3	1600V	1760V	V
MD350C18D3	MD350A18D3	MD350K18D3	1800V	2000V	V
MD350C20D3	MD350A20D3	MD350K20D3	2000V	2200V	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=100℃	350	A
IFSM	t=10ms Tvj=TVjM	9100	A
i²t	t=10ms Tvj=TVjM	414000	A²s
Visol	a.c.50HZ;r.m.s.;1min,Iiso :2mA(max)	2500	V
Tvj		-40 to 150	℃
Tstg		-40 to 125	℃
Mt	To terminals(M8)	12±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	690	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	per diode	0.11	℃/W
Rth(c-s)	per diode	0.04	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	T=25℃ IF =1050A			1.35	V
IRRM	Tvj=TVjM V=VRRM			30	mA
VFO	Tvj=TVjM			0.75	V
rF	Tvj=TVjM			0.61	mΩ

Performance Curves

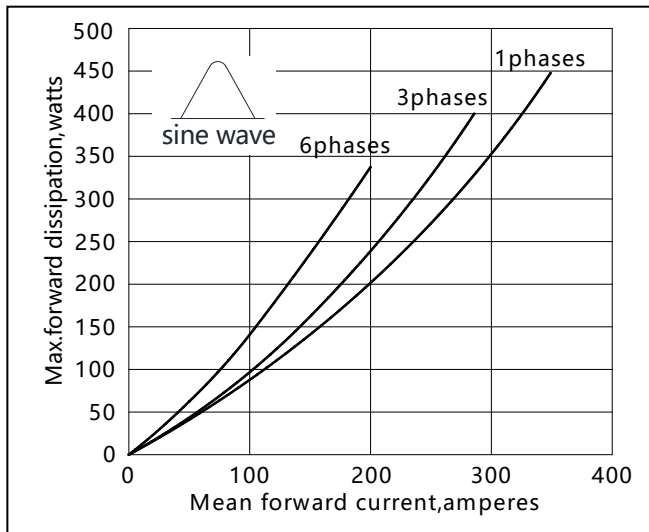


Fig1. Power dissipation

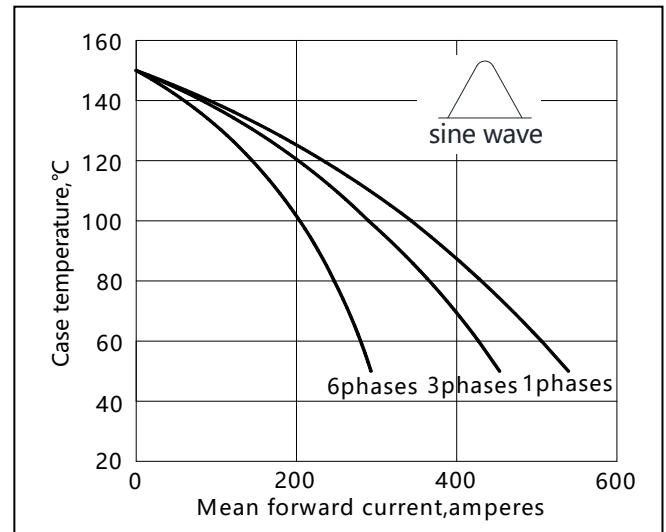


Fig2. Forward Current Derating Curve

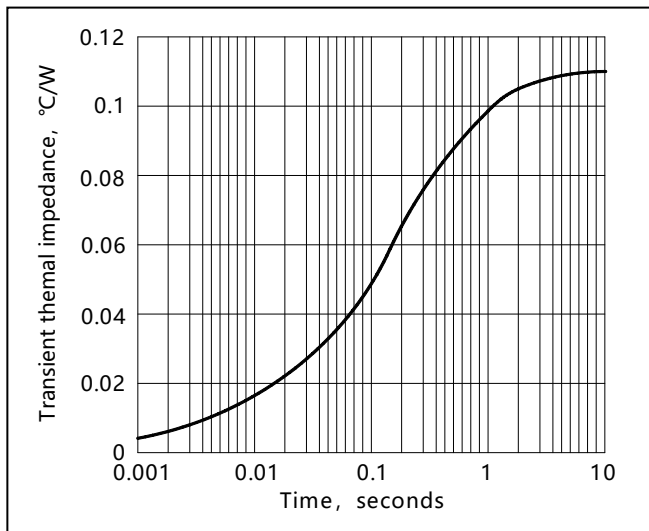


Fig3. Transient thermal impedance

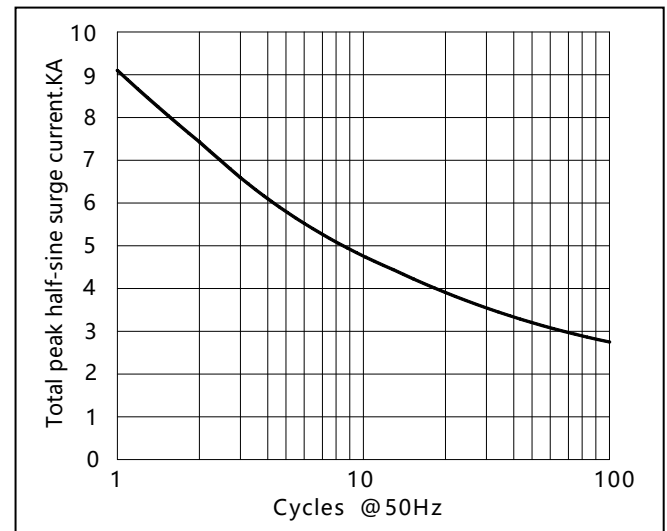


Fig4. Max Non-Repetitive Forward Surge Current

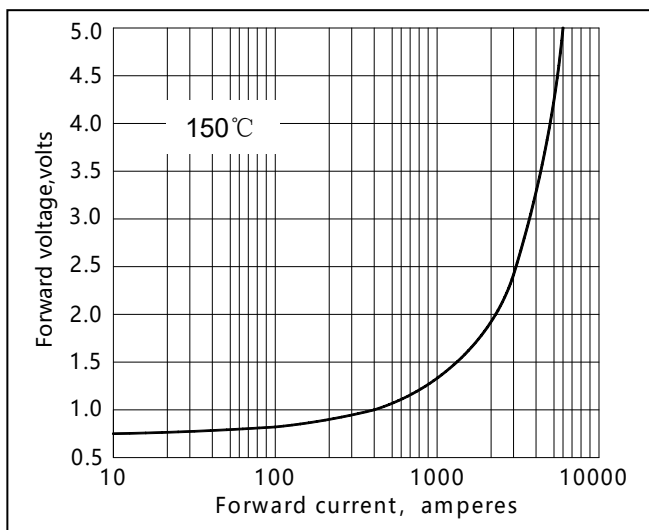



Fig5. Forward Characteristics



MD350C(A/K)-D3

Package Outline Information

CASE: D3

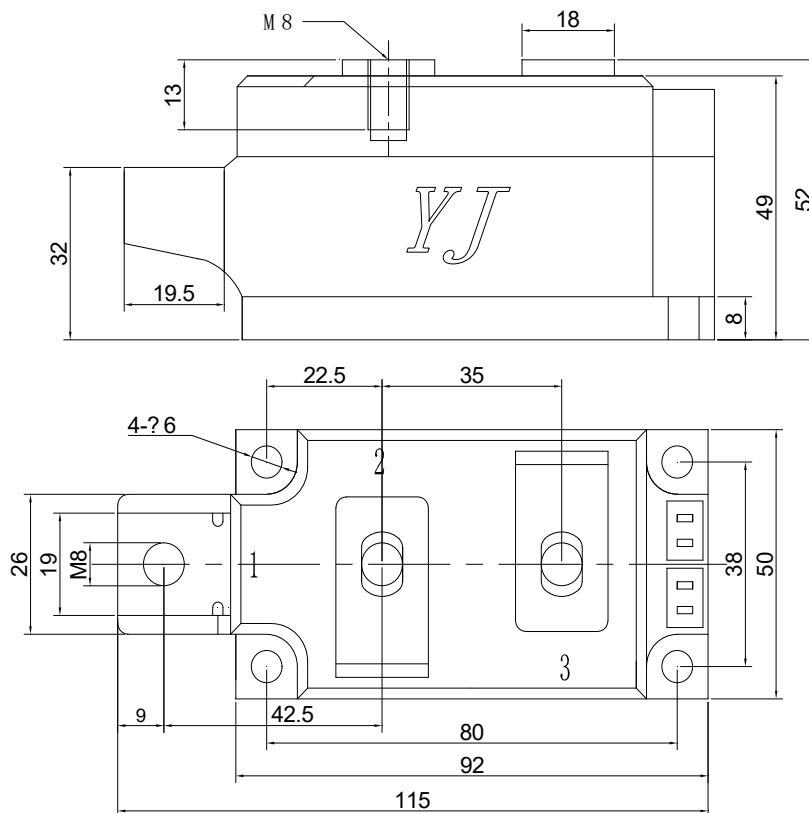

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$