



Surface Mount Zener Diodes

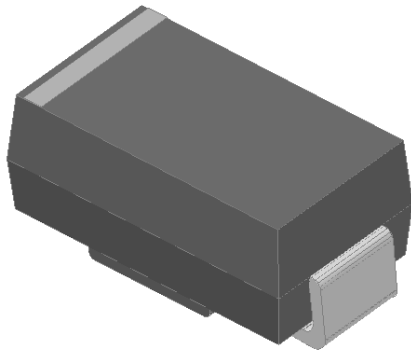

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Part no. with suffix "Q" means AEC-Q101 qualified

Mechanical Data

- **Package:** DO-214AC (SMA)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MAX
DC power dissipation at T _L = 75 °C	P _D	W	3.0
Maximum instantaneous forward voltage@ I _F =200mA	V _F	V	1.5
Maximum junction temperature	T _J	°C	-55 to +150
Storage temperature range	T _{stg}	°C	-55 to +150

■Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal resistance(Typical)	R _{θJ-L} ⁽¹⁾	°C/W	junction to lead	36
	R _{θJ-A} ⁽¹⁾	°C/W	junction to ambient	90

Note

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5 mm x 5 mm) copper pad areas



SMA3Z6.8AQ THRU SMA3Z200AQ

■Electrical Characteristics (T_a=25℃ Unless otherwise specified)

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum DC Zener Current
	Min V _Z ⁽¹⁾ at I _{ZT}	Typ. V _Z ⁽¹⁾ at I _{ZT}	Max V _Z ⁽¹⁾ at I _{ZT}	I _{ZT}	Z _{zT} at I _{ZT}	Z _{zK} at I _{ZK}	I _{ZK}	I _R	Test voltage V _R	I _{ZM}
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
SMA3Z6.8AQ	6.46	6.8	7.14	55.1	2.5	200	1.00	5	5.2	440
SMA3Z7.5AQ	7.13	7.5	7.88	50.0	3.0	400	0.50	5	6.0	400
SMA3Z8.2AQ	7.79	8.2	8.61	45.7	3.5	400	0.50	5	6.5	364
SMA3Z9.1AQ	8.65	9.1	9.56	41.2	4.0	500	0.50	5	7.0	328
SMA3Z10AQ	9.50	10.0	10.50	37.5	4.5	500	0.25	5	8.0	300
SMA3Z11AQ	10.45	11.0	11.55	34.1	5.5	550	0.25	1	8.4	272
SMA3Z12AQ	11.40	12.0	12.60	31.2	6.5	550	0.25	1	9.1	250
SMA3Z13AQ	12.35	13.0	13.65	28.8	7.0	550	0.25	1	9.9	230
SMA3Z15AQ	14.25	15.0	15.75	25.0	9.0	600	0.25	1	11.4	200
SMA3Z16AQ	15.20	16.0	16.80	23.4	10.0	600	0.25	1	12.2	186
SMA3Z18AQ	17.10	18.0	18.90	20.8	12.0	650	0.25	1	13.7	166
SMA3Z20AQ	19.00	20.0	21.00	18.7	14.0	650	0.25	1	15.2	150
SMA3Z22AQ	20.90	22.0	23.10	17.0	17.5	650	0.25	1	16.7	136
SMA3Z24AQ	22.80	24.0	25.20	15.6	19.0	700	0.25	1	18.2	124
SMA3Z27AQ	25.65	27.0	28.35	13.9	23.0	700	0.25	1	20.6	110
SMA3Z30AQ	28.50	30.0	31.50	12.5	28.0	750	0.25	1	22.8	100
SMA3Z33AQ	31.35	33.0	34.65	11.4	33.0	800	0.25	1	25.1	90
SMA3Z36AQ	34.20	36.0	37.80	10.4	38.0	850	0.25	1	27.4	82
SMA3Z39AQ	37.05	39.0	40.95	9.6	45.0	900	0.25	1	29.7	76
SMA3Z43AQ	40.85	43.0	45.15	8.7	53.0	950	0.25	1	32.7	68
SMA3Z47AQ	44.65	47.0	49.35	8.0	67.0	1000	0.25	1	35.8	62
SMA3Z51AQ	48.45	51.0	53.55	7.3	70.0	1100	0.25	1	38.8	58
SMA3Z56AQ	53.20	56.0	58.80	6.7	86.0	1300	0.25	1	42.6	52
SMA3Z62AQ	58.90	62.0	65.10	6.0	100.0	1500	0.25	1	47.1	48
SMA3Z68AQ	64.60	68.0	71.40	5.5	120.0	1700	0.25	1	51.7	44
SMA3Z75AQ	71.25	75.0	78.75	5.0	140.0	2000	0.25	1	56.0	40
SMA3Z82AQ	77.90	82.0	86.10	4.6	160.0	2500	0.25	1	62.2	36
SMA3Z91AQ	86.45	91.0	95.55	4.1	200.0	3000	0.25	1	69.2	32
SMA3Z100AQ	95.00	100.0	105.00	3.7	250.0	3100	0.25	1	76.0	30
SMA3Z110AQ	104.50	110.0	115.50	3.4	300.0	4000	0.25	1	83.6	26
SMA3Z120AQ	114.00	120.0	126.00	3.1	380.0	4500	0.25	1	91.2	24
SMA3Z130AQ	123.50	130.0	136.50	2.9	450.0	5000	0.25	1	98.8	22
SMA3Z150AQ	142.50	150.0	157.50	2.5	600.0	6000	0.25	1	114.0	20
SMA3Z160AQ	152.00	160.0	168.00	2.3	700.0	6500	0.25	1	121.6	18
SMA3Z180AQ	171.00	180.0	189.00	2.1	900.0	7000	0.25	1	136.8	16
SMA3Z200AQ	190.00	200.0	210.00	1.9	1200.0	8000	0.25	1	152.0	14

Notes:

(1) Nominal Zener voltage Range: 95% Typ.V_Z (1)at I_{ZT}----105% Typ.V_Z (1)at I_{ZT}



SMA3Z6.8AQ THRU SMA3Z200AQ

■ Characteristics (Typical)

Fig.1:Power Temperature Derating Curve

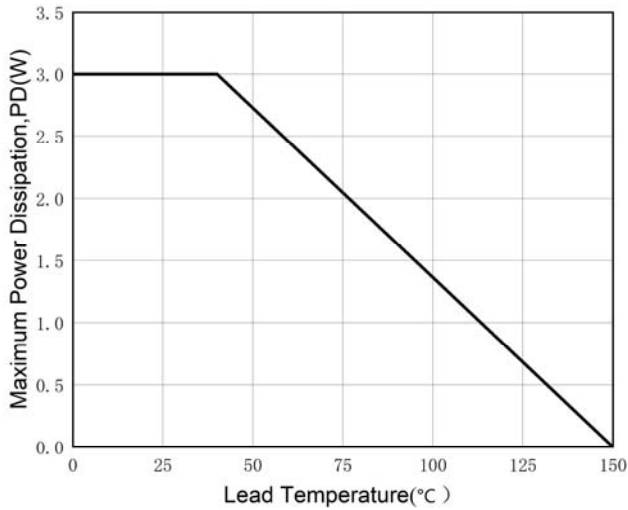


Fig.2:Typical Zener Breakdown Characteristics


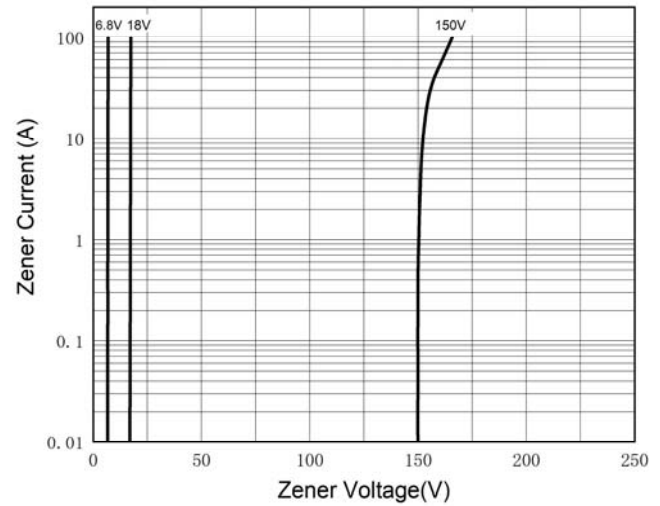


Fig.3 Pulse Waveform



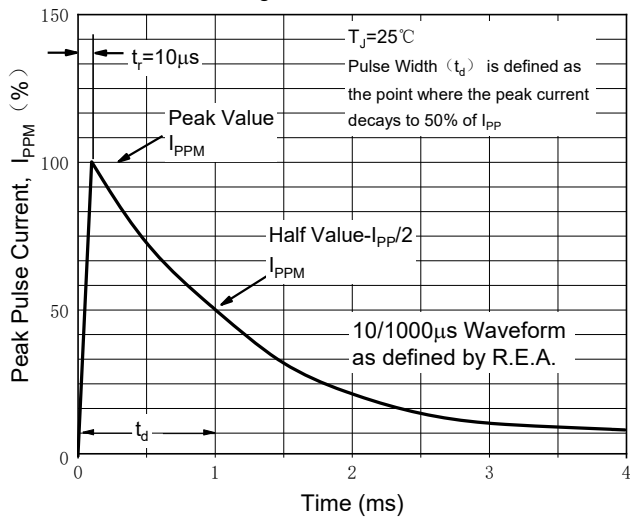


SMA3Z6.8AQ THRU SMA3Z200AQ

■ Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SMA3Z6.8AQ ~SMA3Z200AQ	F2	Approximate 0.067	7500	120000	13" reel

■ Marking Information

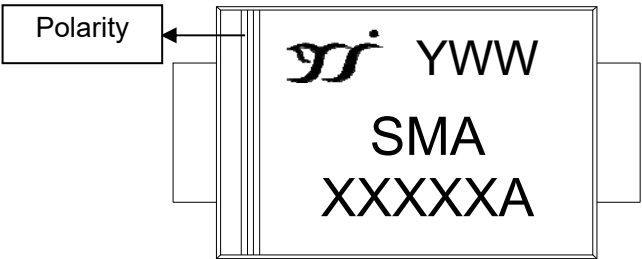


Note:
1. All marking is at middle of the product body
2. All marking is in laser printing
3.XXX is marking code, like SMA3Z6.8AQ marking code is 3Z6.8A
4. Body color: Black
5. YWW is date code, “Y” is year. “WW” is week.
For instance:
The 45th week of 2025, date code is 545

■ Outline Dimensions

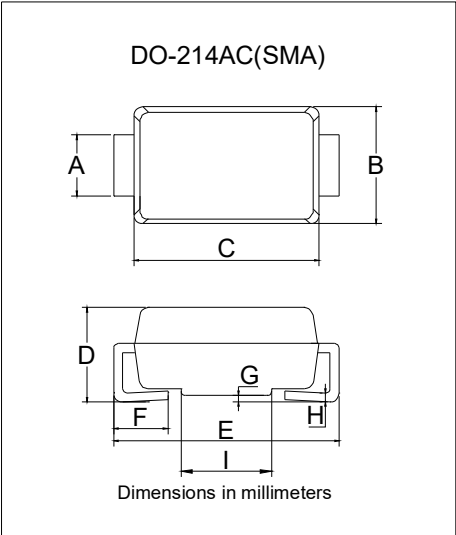

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.00	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.05	0.20
H	0.15	0.31
I	1.7	2.1

■ Suggested pad layout

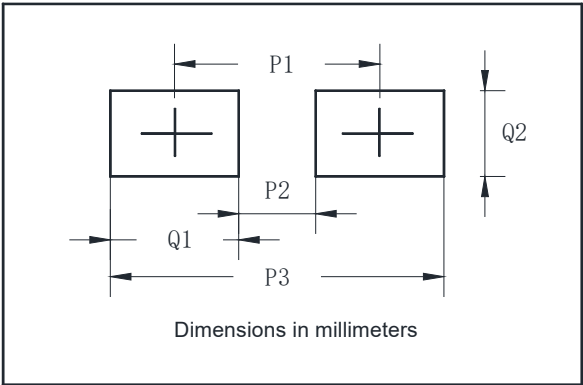

DO-214AC(SMA)	
Dim	Millimeters
P1	4.00
P2	1.50
P3	6.50
Q1	2.50
Q2	1.70



SMA3Z6.8AQ THRU SMA3Z200AQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.