


Fast Recovery Bridge Rectifiers




Features

- UL recognition, file #E230084
- Glass passivated chip junction
- Thin single in-line package
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.



Mechanical Data

- **Package:** 2KBJ
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	RGBL208	RGBL210
Device marking code			RGBL208	RGBL210
Maximum Repetitive Peak Reverse Voltage	VRRM	V	800	1000
Maximum RMS Voltage	VRMS	V	560	700
Maximum DC blocking Voltage	VDC	V	800	1000
Average Rectified Output Current @60Hz sine wave, R-load, Ta=25°C	IO	A	2.0	
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Tj=25°C	IFSM	A	90	
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25°C			180	
Current squared time @1ms≤t<8.3ms Tj=25°C, rating of per diode	I ² t	A ² S	33.6	
Dielectric strength @ terminals to case, AC 1 minute	Vdis	KV	2	
Storage temperature	Tstg	°C	-55 ~ +150	
Junction temperature	Tj	°C	-55 ~ +150	



RGBL208 THRU RGBL210

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	RGBL208	RGBL210
Maximum reverse recovery time	T_{rr}	ns	$I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$	500	
Maximum instantaneous forward voltage drop per diode	V_F	V	$I_{FM}=1.0A$	1.3	
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	$T_j=25^\circ C$	5	
			$T_j=125^\circ C$	100	
Typical junction capacitance	C_j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	14	



■Thermal Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	RGBL208	RGBL210
Thermal Resistance	Between junction and ambient	$R_{\theta J-A}$	$^\circ C/W$	47	
	Between junction and case	$R_{\theta J-C}$		10	

■Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
RGBL208- RGBL210	B1	Approximate 2.19	22	1320	5280	Tube

■ Characteristics (Typical)

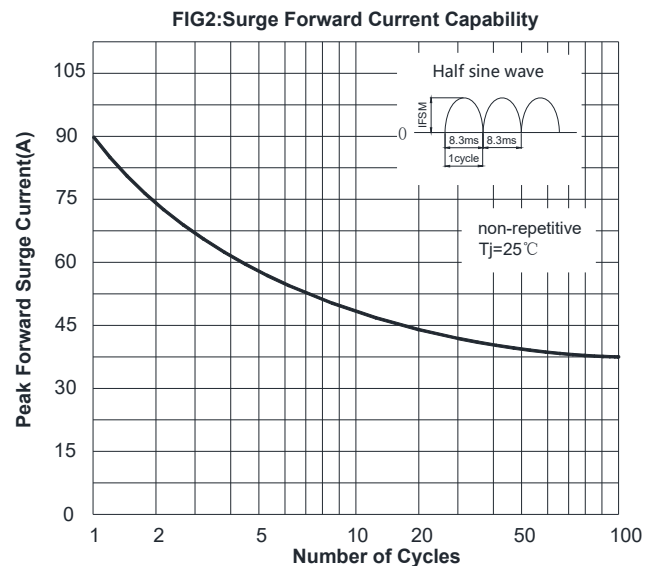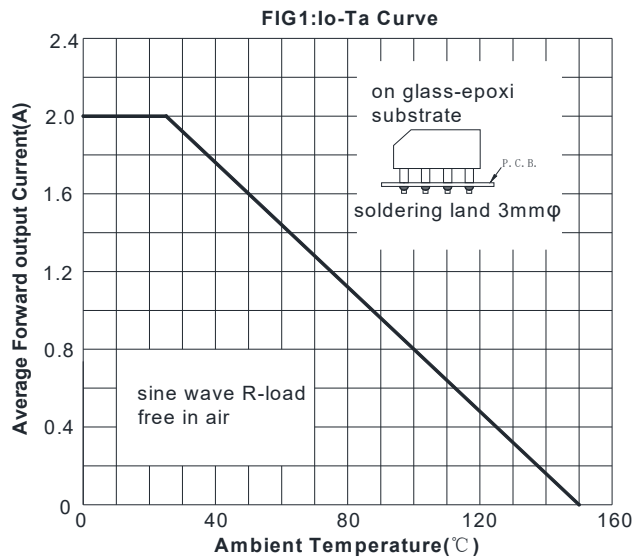



RGBL208 THRU RGBL210



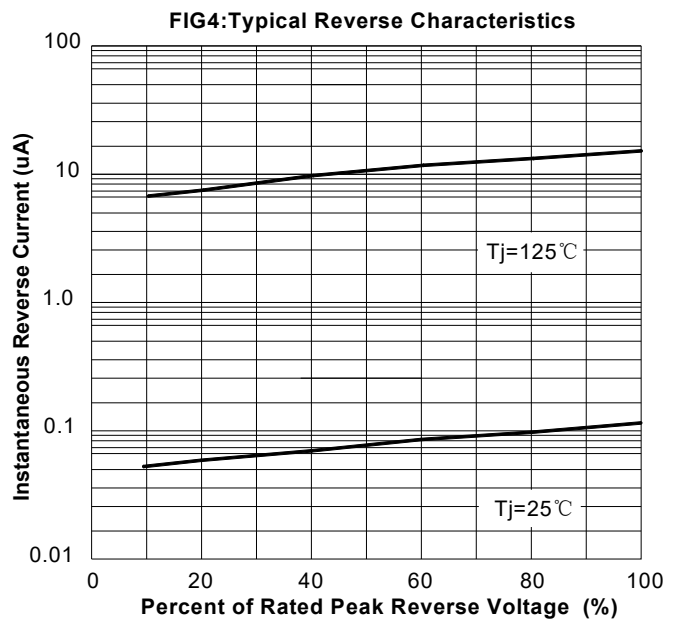



FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

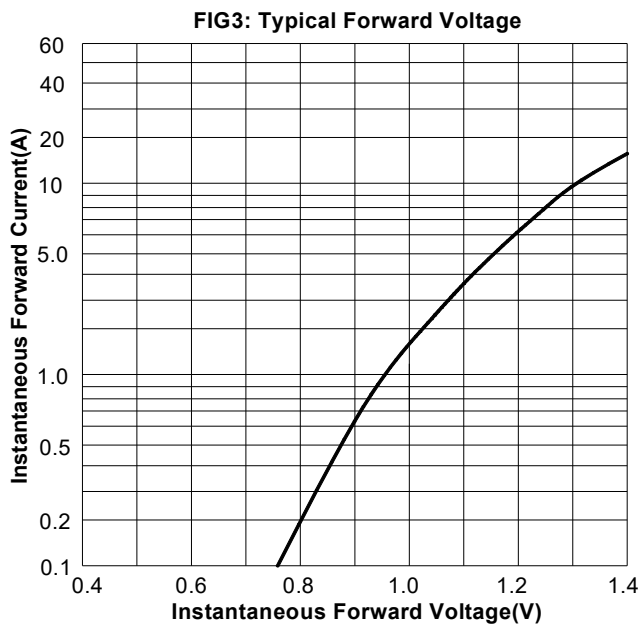

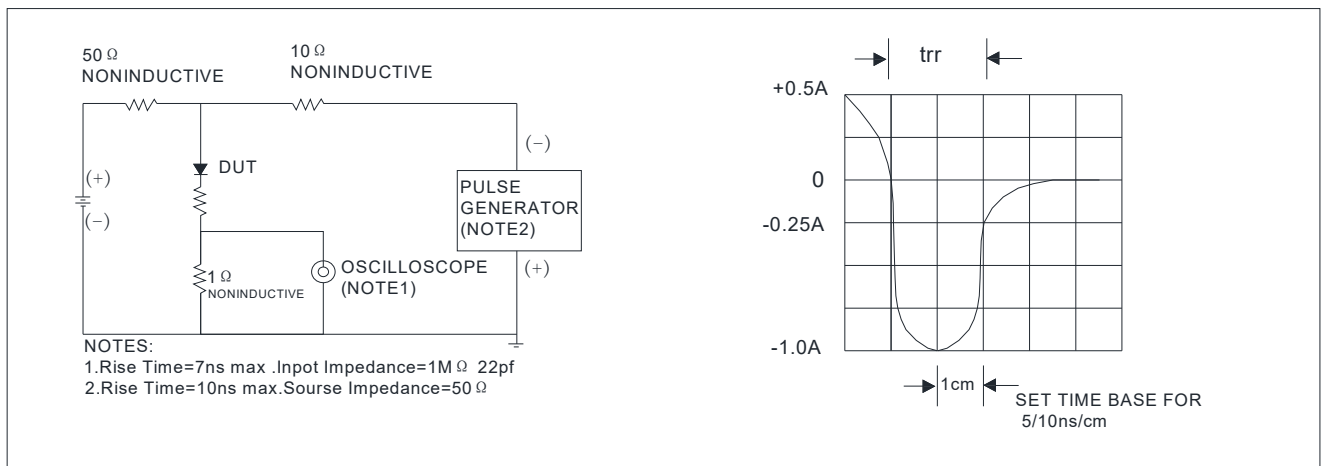

RGBL208 THRU RGBL210

■ Outline Dimensions

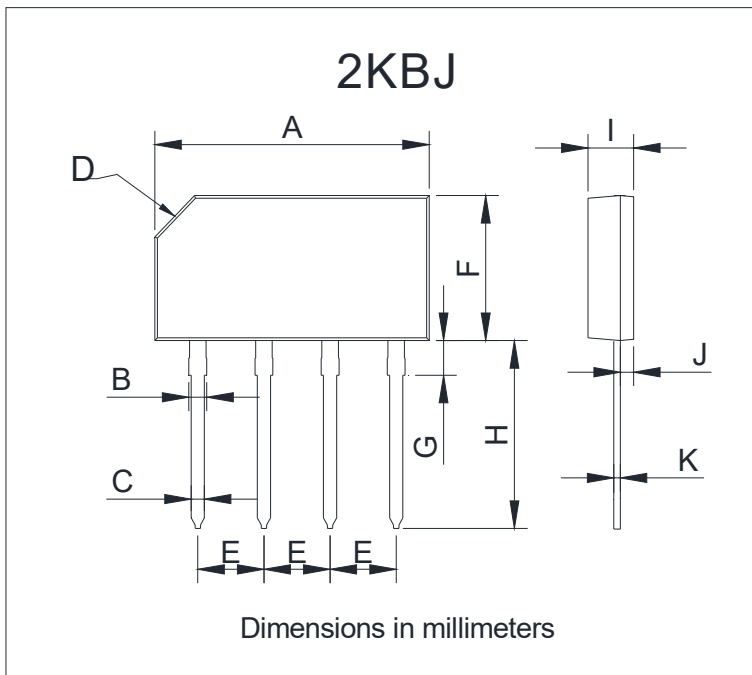

2KBJ		
Dim	Min	Max
A	19.2	21.2
B	1.2	1.8
C	1.0	1.2
D	Typ: 3.0	
E	4.9	5.1
F	10.5	11.5
G	2.0	3.0
H	13.0	15.0
I	3.0	4.0
J	0.9	1.1
K	0.4	0.6



RGBL208 THRU RGBL210

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.