





N-Channel Enhancement Mode Field Effect Transistor

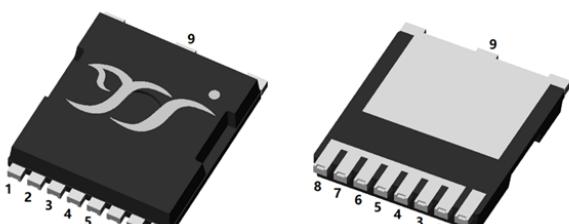

Top View

Bottom View

TOLL



Product Summary

- V_{DS} 60V
- I_D 300A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) <2mΩ
- $R_{DS(ON)}$ (at $V_{GS}=6V$) <2.5mΩ
- 100% EAS Tested
- 100% ∇V_{DS} Tested

General Description

- Double trench MOSFET technology
- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free
- Moisture Sensitivity Level 1

Applications

- High power inverter system
- Uninterruptible power supply
- LCDM appliances

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source Voltage	V_{DS}	60	V
Gate-source Voltage	V_{GS}	± 20	V
Drain Current	I_D	30	A
		19	
		300	
		190	
Pulsed Drain Current ^A	I_{DM}	1200	A
Avalanche energy ^B	EAS	1690	mJ
Total Power Dissipation ^C	P_D	4	W
		1.6	
		312	
		125	
Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	°C

Thermal resistance

Parameter	Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient ^D	$R_{\theta JA}$	25	30	°C/W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	0.32	0.4	

Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJT300G06H	F1	YJT300G06H	2000	4000	20000	13" reel



YJT300G06H

■ Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	60	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V	-	-	1	μA
		V _{DS} =60V, V _{GS} =0V, T _j =150°C	-	-	100	
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2	2.5	4	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =150A	-	1.5	2	mΩ
		V _{GS} =10V, I _D =20A	-	1.5	2	
		V _{GS} =6V, I _D =20A	-	1.85	2.5	
Diode Forward Voltage	V _{SD}	I _S =150A, V _{GS} =0V	-	0.9	1.2	V
Gate resistance	R _G	f=1MHz	-	1.1	-	Ω
Maximum Body-Diode Continuous Current	I _S		-	-	300	A
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =30V, V _{GS} =0V, f=1MHz	-	8350	-	pF
Output Capacitance	C _{oss}		-	2200	-	
Reverse Transfer Capacitance	C _{rss}		-	300	-	
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =10V, V _{DS} =30V, I _D =150A	-	108	-	nC
Gate-Source Charge	Q _{gs}		-	27	-	
Gate-Drain Charge	Q _{gd}		-	25	-	
Reverse Recovery Charge	Q _{rr}	I _F =150A, di/dt=100A/us	-	208	-	nC
Reverse Recovery Time	t _{rr}		-	80	-	
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DD} =30V, I _D =150A R _{GEN} =2.2Ω	-	27	-	ns
Turn-on Rise Time	t _r		-	261	-	
Turn-off Delay Time	t _{D(off)}		-	48	-	
Turn-off fall Time	t _f		-	13	-	

- A. Repetitive rating; pulse width limited by max. junction temperature.
- B. T_J=25°C, V_{DD}=50V, V_G=10V, R_G=25Ω, L=5mH, IAS=26A.
- C. P_d is based on max. junction temperature, using junction-case thermal resistance.
- D. The value of R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in the still air environment with T_A=25°C. The maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.

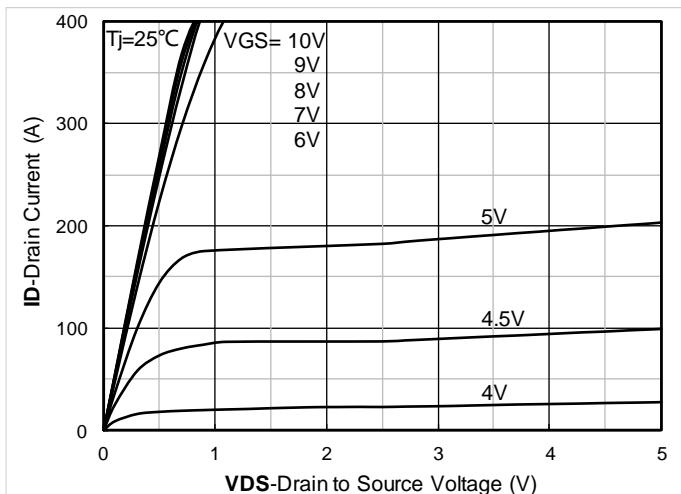
**■Typical Electrical and Thermal Characteristics Diagrams**

Figure 1. Output Characteristics

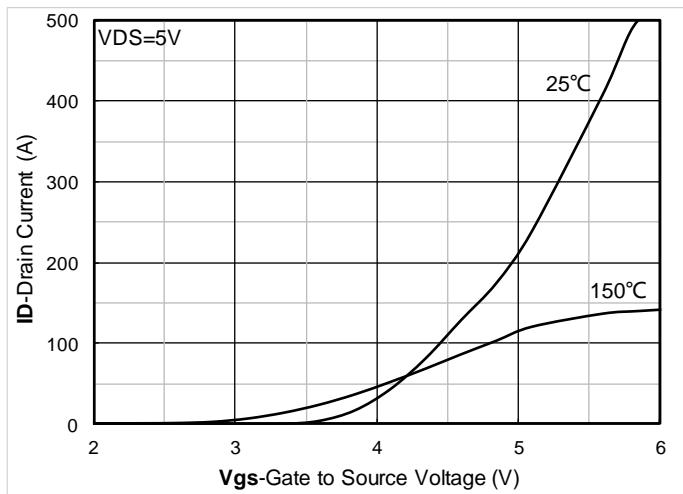


Figure 2. Transfer Characteristics

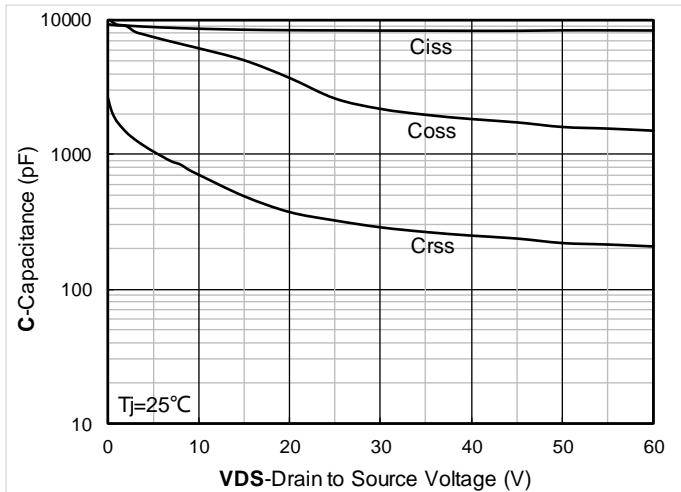


Figure 3. Capacitance Characteristics

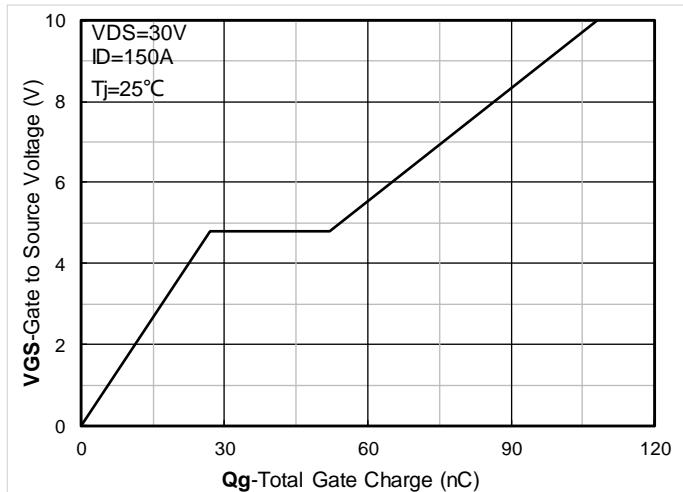


Figure 4. Gate Charge

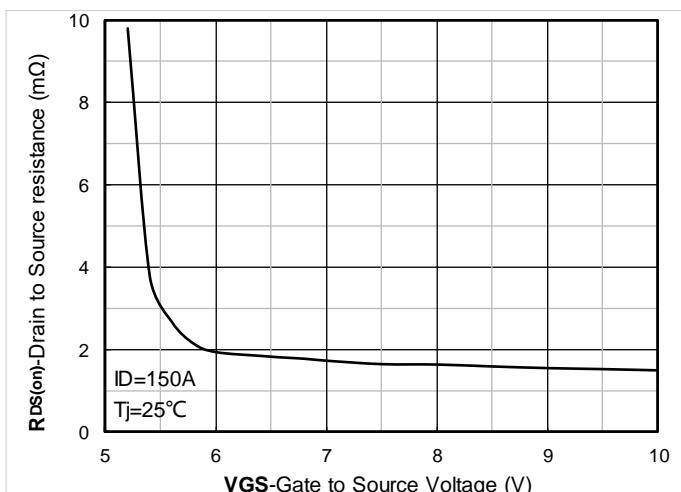


Figure 5. On-Resistance vs Gate to Source Voltage

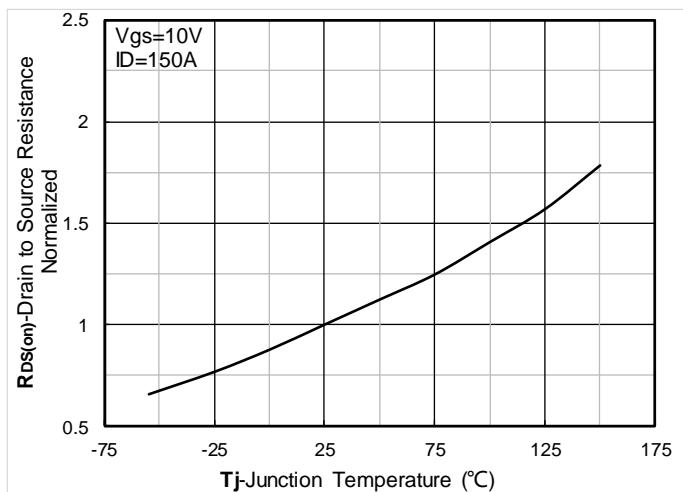


Figure 6. Normalized On-Resistance



YJT300G06H

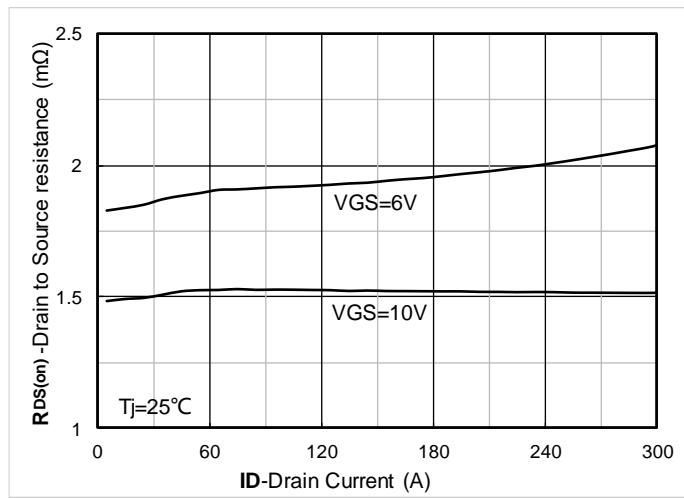


Figure 7. RDS(on) VS Drain Current

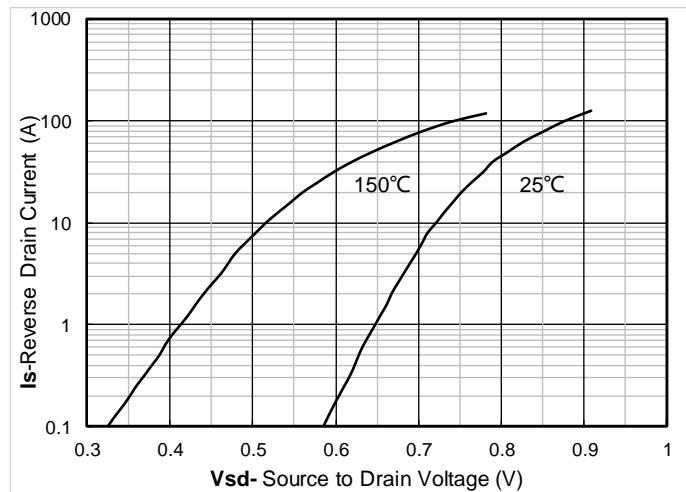


Figure 8. Forward characteristics of reverse diode

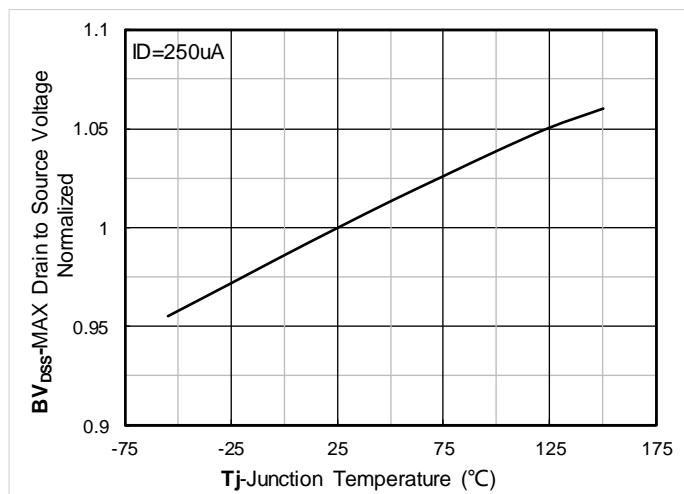


Figure 9. Normalized breakdown voltage

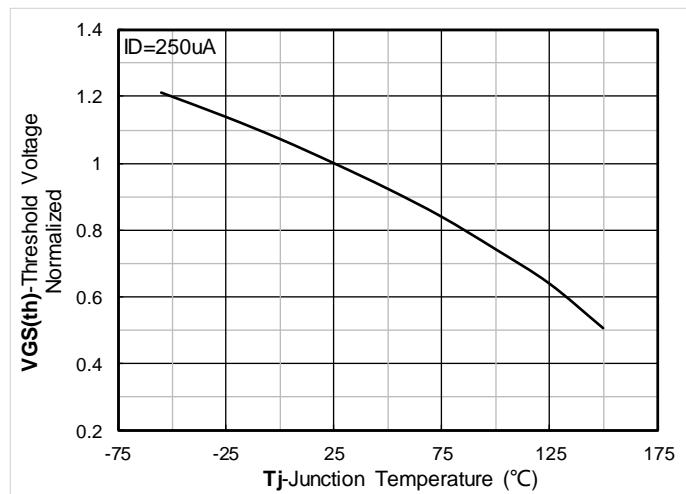


Figure 10. Normalized Threshold voltage

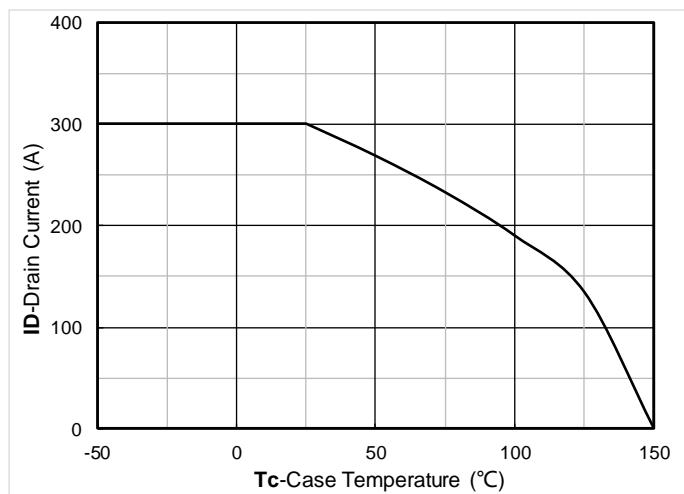


Figure 11. Current dissipation

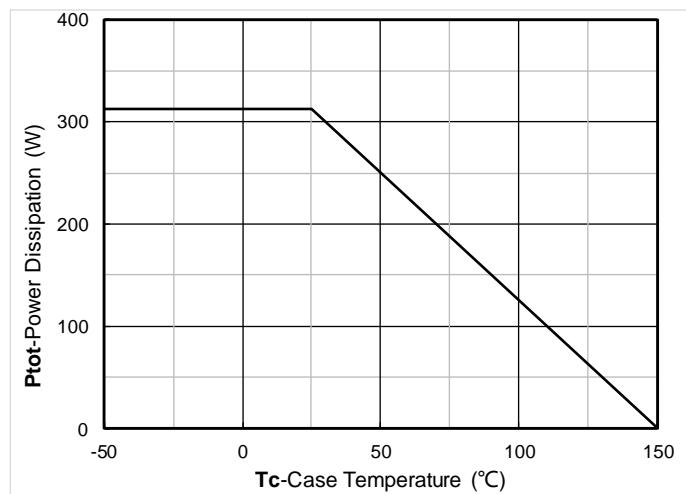


Figure 12. Power dissipation

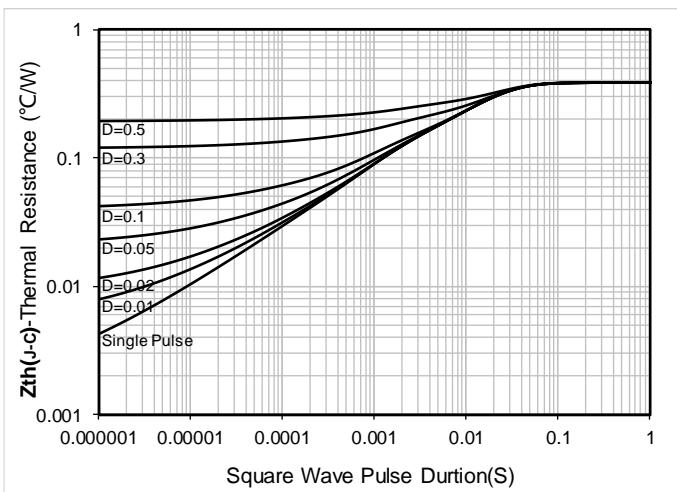


Figure 13. Maximum Transient Thermal Impedance

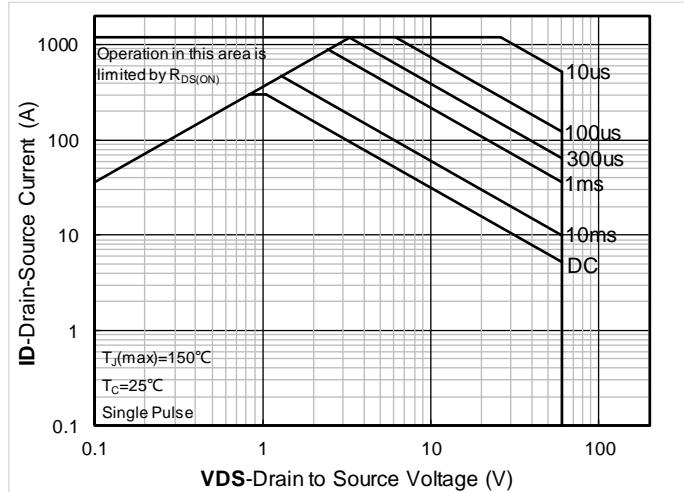


Figure 14. Safe Operation Area

■ Test Circuits & Waveforms

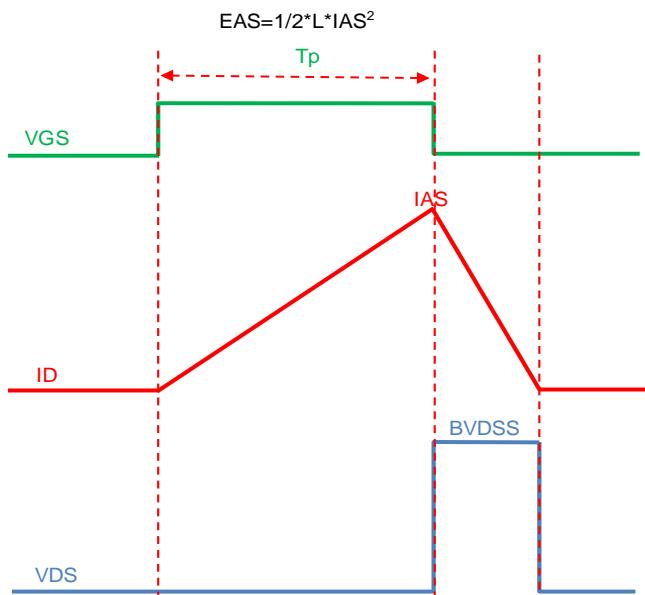
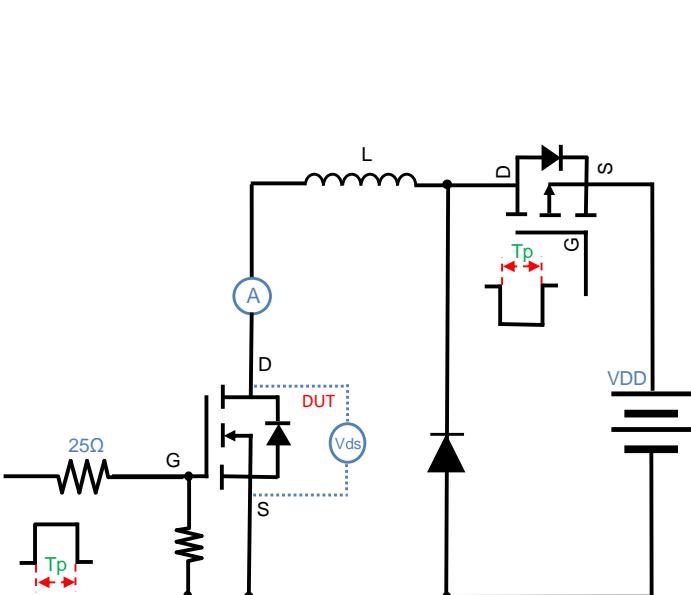


Figure A. Unclamped Inductive Switching (UIS) Test Circuit & Waveform

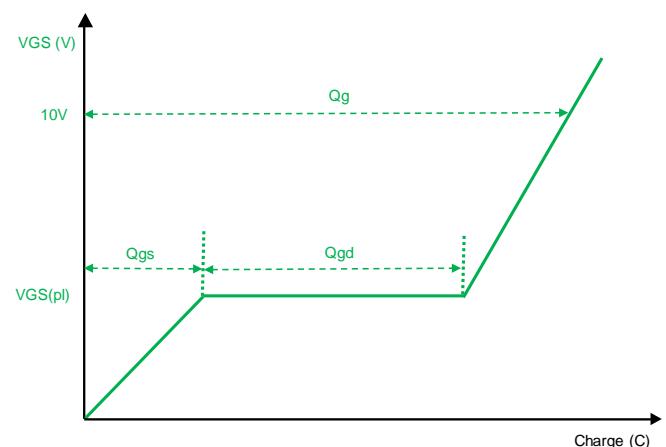
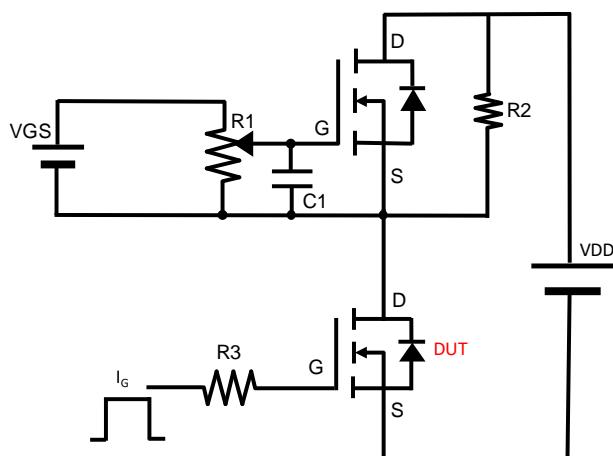


Figure B. Gate Charge Test Circuit & Waveform

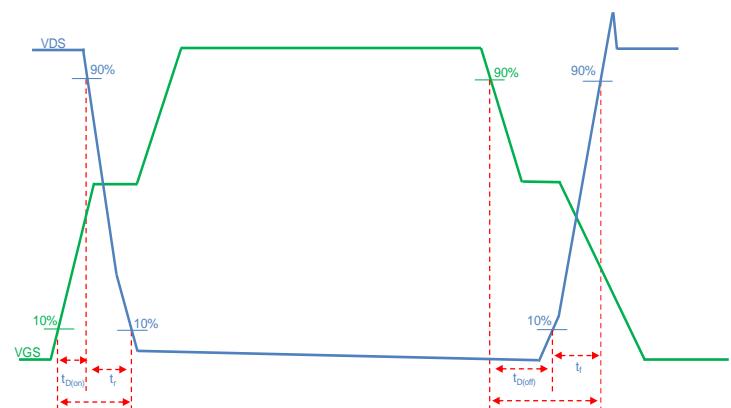
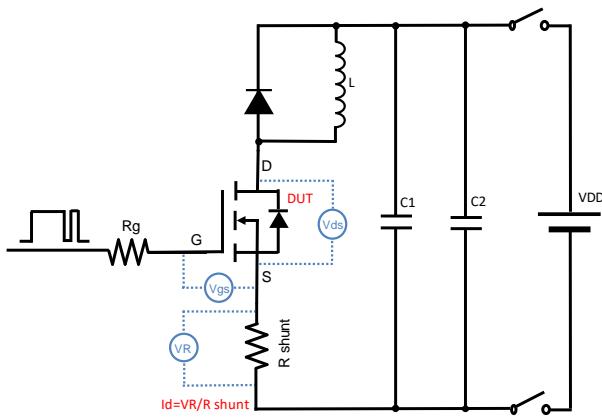


Figure C. Resistive Switching Test Circuit & Waveform





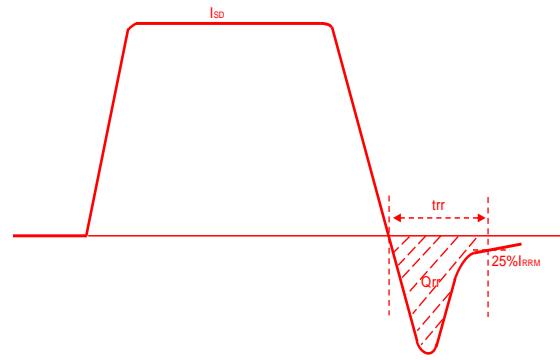


Figure D. Diode Recovery Test Circuit & Waveform

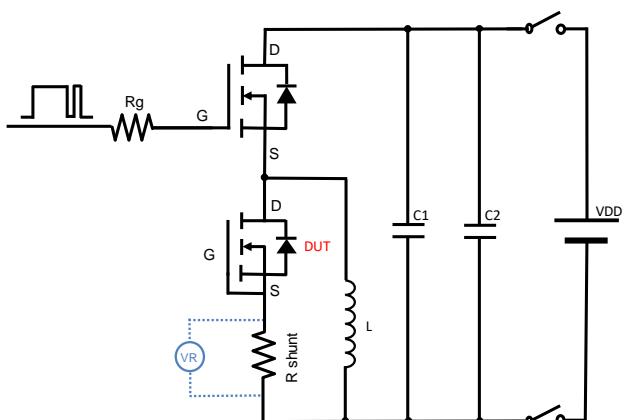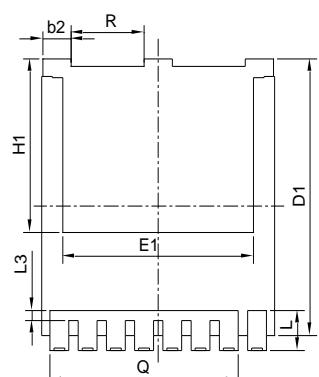


■ TOLL Package information

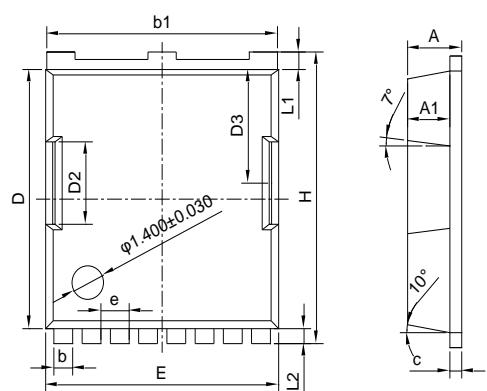

TOP VIEW


SIDE VIEW

BOTTOM VIEW



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.03\text{mm}$.
3. The pad layout is for reference purposes only.

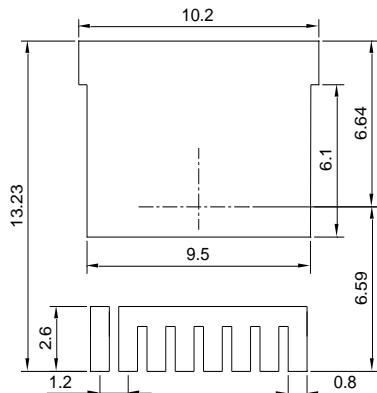SUGGESTED SOLDER PAD LAYOUT
TOP VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	2.2	2.3	2.4
A1	1.7	1.8	1.9
b	0.7	0.8	0.9
b1	9.7	9.8	9.9
b2	1.1	1.2	1.3
c	0.4	0.5	0.6
D	10.28	10.38	10.48
D1	10.98	11.08	11.18
D2	3.2	3.3	3.4
D3	4.45	4.55	4.65
E	9.8	9.9	10
E1	8	8.1	8.2
e		1.2 BSC	
H	11.58	11.68	11.78
H1		6.95 BSC	
i		0.1 REF	
j		0.46 REF	
L	1.5	1.6	1.7
L1	0.6	0.7	0.8
L2	0.5	0.6	0.7
L3	0.3	0.4	0.5
Q		8 REF	
R	3.0	3.1	3.2

UNIT: mm



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use or sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.